


Hinged anti-burglary doors ESN1

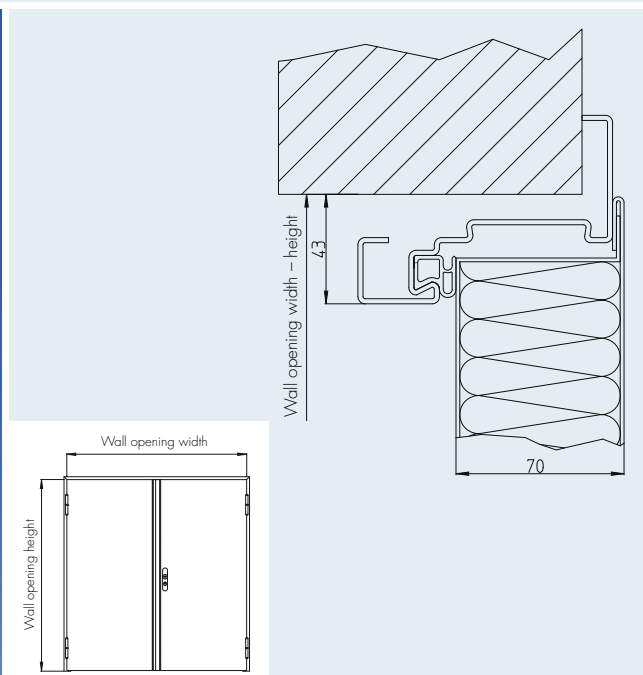

Wall opening (width x height)


Standard dimensions

_____ x _____ mm
 from: 625 x 500 mm
 to: 2750 x 2750 mm
 Other dimensions available on request.


Surface

- Polished, grain size 240
 - Stripe finish
 - Circular brush finish
- Other finishes available on request.

Opening direction



Frames

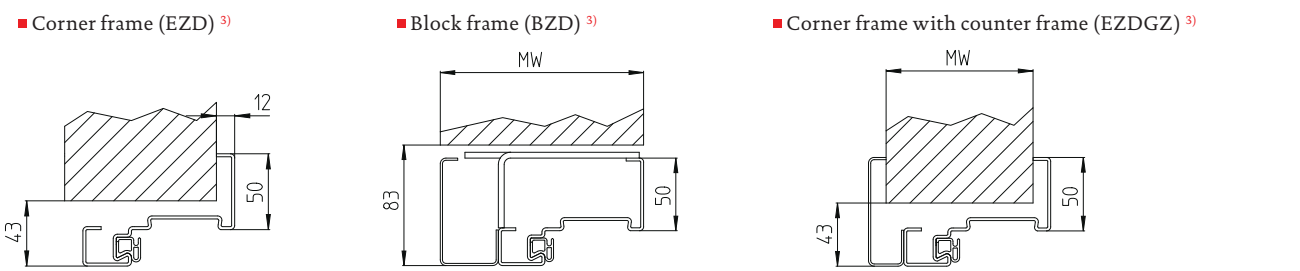

Description for use in tenders

Hinged anti-burglary door, model ESN1 / ESN2; with corner frame made in sheet steel, thickness 2.0 mm; with seal on 3 sides; burglary resistance class RC1 - RC4 according to EN 1627; door leaf 70 mm thick, thin folded on 3 sides, fully sealed, double-wall construction in machine-straightened sheet steel, thickness 1.5 mm; with internal stainless steel stiffening profiles; suitable for retrofitting with door-closing mechanisms; rigid PUR HD foam insulation; DIN 18250 class 4 lock with stainless steel face plate, profile cylinder hole; DIN 18273 ES1 - ES3 stainless steel handle set; 2 stainless steel construction hinges (200 mm) with axial ball bearings per leaf, for minimum friction. Optional: can be equipped to serve as fire safety door.

Material

- 1.4301 (AISI 304)
- 1.4571 (AISI 316 Ti) ¹⁾